



PRO SERIES


INSERTER 3000

CARD MAILING: FAST AND EASY CARD AFFIXING & MAILING SOLUTION

Standard



Optional

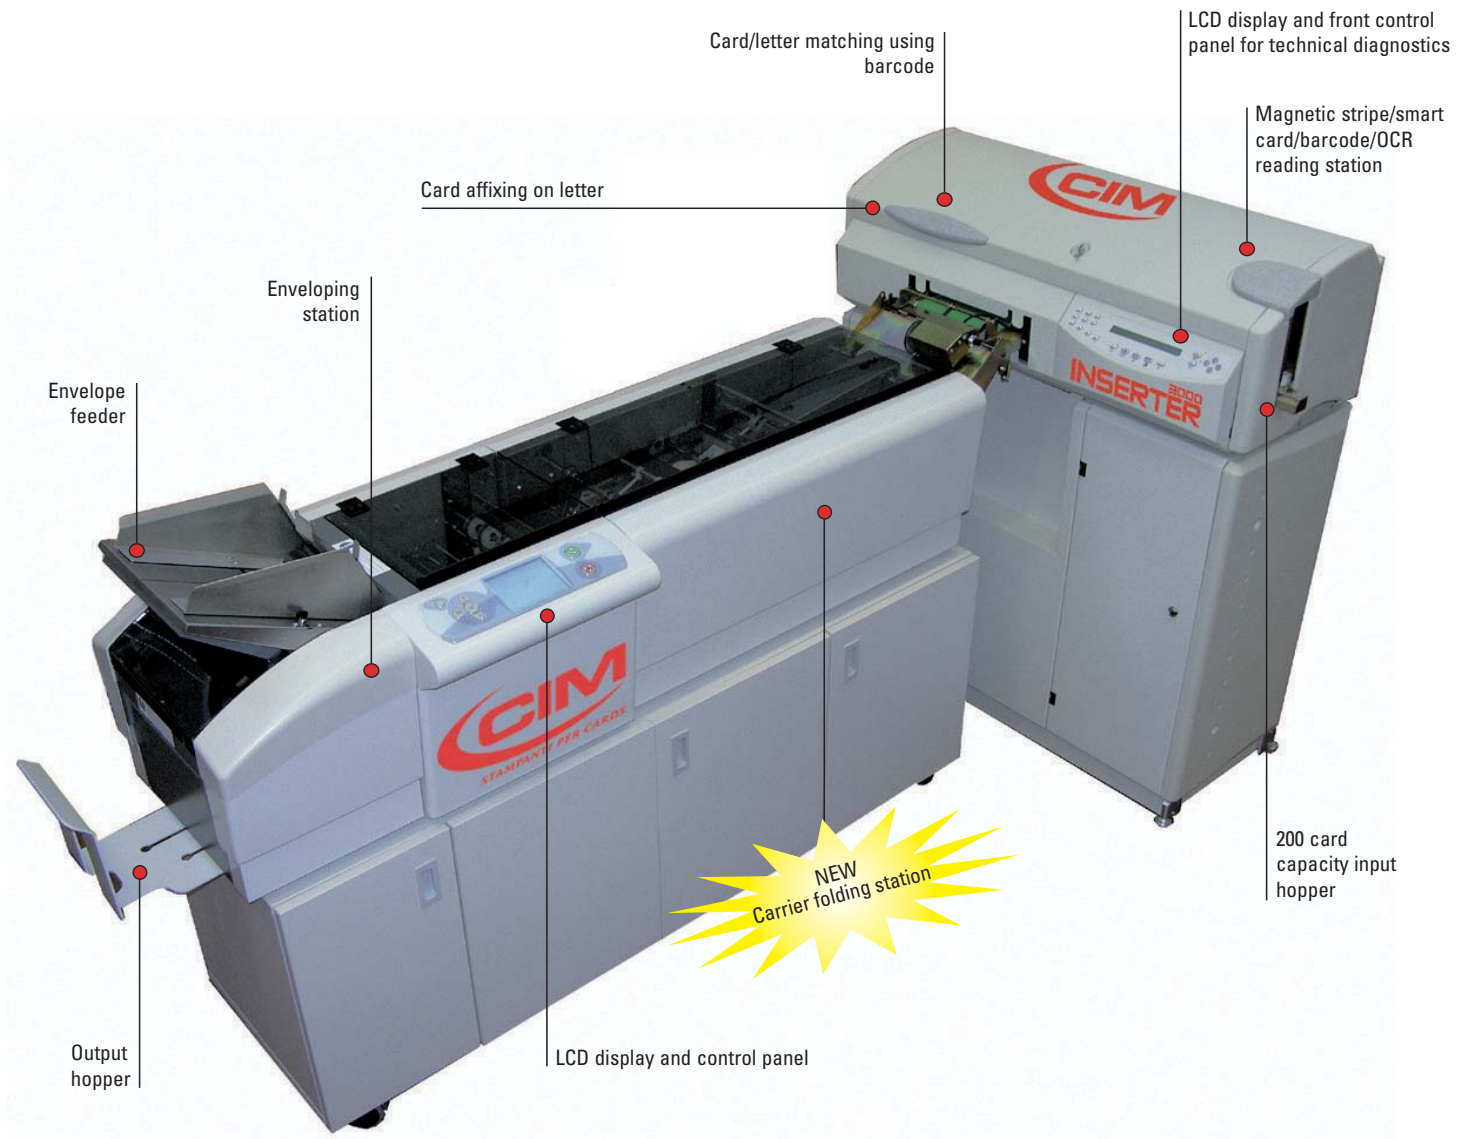

IDEAL FOR MAILING:

- Bank cards
- Loyalty programs, membership cards
- Insurance membership cards
- State and government ID card programs i.e. drivers licenses, benefits cards, state insurance cards and health care cards

USED BY

- Banks / Credit Institutions
- Insurance Companies
- HMOs / TPAs
- Clubs / Associations
- Government Offices
- Service Bureaux

MAXMAILER PLUS

Folding & enveloping modular system for high performance and flexibility. The new solution is equipped with a new carrier folding station with improved performance and reliability



INSERTER 3000:

MULTIPLE SOLUTIONS TO MAKE YOUR CARD MAILING FASTER, EASIER AND MORE COST EFFECTIVE

"The INSERTER 3000 has been developed with new and advanced features. It affixes cards quickly and easily to a card carrier which can be personalized in real time using a laser printer."

The INSERTER 3000 can operate in stand-alone or in-line configuration with other PRO SERIES equipment to offer the most complete and flexible solution: from complete personalization of the card to affixing it to a carrier, inserting and enveloping with all necessary attachments, ready for distribution.

MAIN FEATURES

LABELING MODULE: DESIGNED FOR HIGH VOLUME PRODUCTION

- A.L.D.S. or Auto-learning Label Detector System. An advanced new sensor assembly that allows precise detection of any type of label, including transparent labels.
- NEW system to recognize the label presence on the card. Thanks to this sensor, equipment reliability has increased.
- A.S.T. or Anti Sliding Traction System. The label drive system has been completely redesigned allowing easy and accurate release of the label from the label roll and precise application and positioning on the card.
- Label roll locking system. This innovative solution allows the label roll to be locked quickly and securely into position and provides complete unwinding of the roll. This will result in zero label wastage.
- Increased label yield. New roll yield up to 3100 standard size (38x13 mm/1.50" x 0.51") labels in every roll allows for greater autonomy.

MULTICARD SOFTWARE

Easy-to-use, extremely flexible and ready for a variety of system configurations. The PRO SERIES equipment and MULTICARD Software have been developed for easy and secure card personalization and mailing using advanced technologies of data recognition and matching.

MAIN FEATURES:

Windows 2000/XP/Vista operating system compatible. 100% data matching and carrier printing using data on card (magnetic stripe, smart card, barcode). Texts, images and logos management. Security checks: automatic letter-card match verification by reading the barcode printed on the carrier; card sequence check before affixing on carrier.

PRO SERIES IN-LINE:

With the LinkWare option, INSERTER 3000 can operate in-line with up to 4 other PRO SERIES machines to perform an end to end production process from card personalization to MAILING.

LASER PRINTING SOLUTIONS

PERSONALIZED CARRIER PRINTING


The personalization options of the card carrier are extremely important in order to meet every customer's individual requirements.

The INSERTER 3000 can be configured with three different commercial laser printers:

- **Kyocera FS9130 series** - B/W laser printer, up to 51 ppm in letter size, front/back printing. Option: extra large paper hopper for a total capacity of 4200 sheets.
- **Kyocera FS3900 series** - B/W laser printer, up to 33 ppm in letter size. Options: front/back print module; extra large paper hopper for a total capacity of 2100 sheets
- **HP 4200/4300/4015 series** - B/W laser printer, up to 55 ppm in letter size. Options: front/back print module; extra large paper hopper for a total capacity of 3100 sheets.

Extra hopper(s) configuration allows the "**Multi-hopper function**" for inserting of attachments of the same carrier format - Letter or A4. Optional.

The printers supplied are always the latest version in the product family.

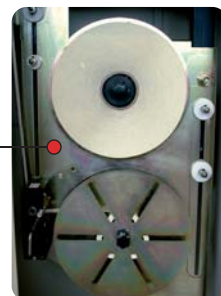

FOLDING & ENVELOPING SOLUTIONS

FOLDING INSERTING ATTACHMENTS & ENVELOPING

The INSERTER 3000 can be configured with MAXMAILER PLUS for folding and enveloping the carrier and inserting leaflets.

The new MAXMAILER PLUS is equipped with a new carrier folding station with improved reliability and performances.


NEW MAXMAILER PLUS FLEXIBLE, ALL-ROUND AND RELIABLE

The new MAXMAILER PLUS is a multi-station system that revolutionizes the mailing process and can be adapted to the various market requirements. Directly connected to INSERTER 3000, the MAXMAILER PLUS receives the carrier with the affixed card, folds and envelops it. Other inserts (pre-folded brochure or booklet, up to 4 mm / 16 mil thick) can be managed.

NEW CARRIER FOLDING STATION


The new carrier folding station, has the same physical size and shape, but the internal components and functionality have been improved increasing reliability and performance.

- Increased speed, up to 3.000 feeds per hour.
- Increased accuracy and reliability in carrier folding thanks to the completely modified internal design.
- Inside access to the fold plate to remove any document that may be jammed.

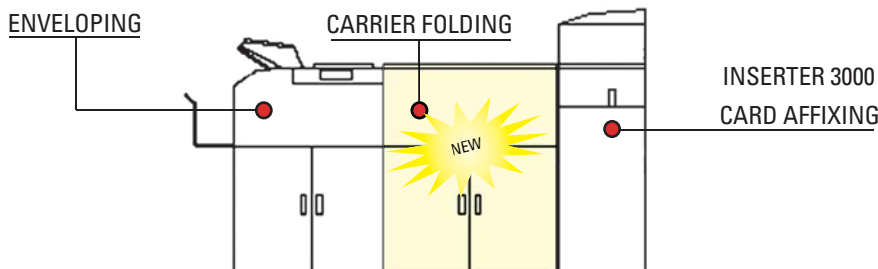

ADDITIONAL MODULES

Flexibility and high performance is a part of the modular system that you may configure to your needs. Up to 3 modules (A+B+C) can be linked in-line for attachments between the enveloping station and the carrier folder.

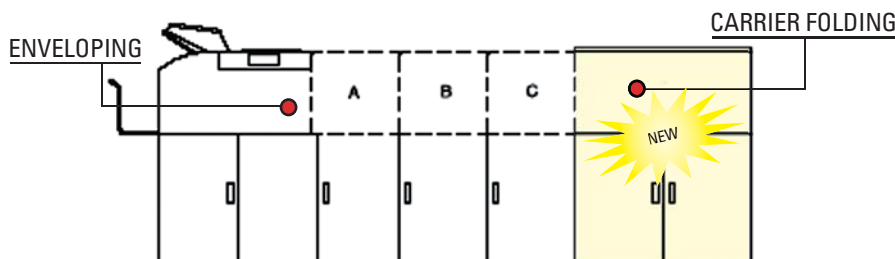

Insertion modules are available with single or double tray and can manage 10 x 21 cm / 3.94" x 8.27" size (e.g. booklet, brochure) for maximum thickness of 6 mm / 0.236", including the carrier with the card. Optional: Tower Folder, designed to save space.

Reliable


Each module of MAXMAILER PLUS is equipped with double feeding control that ensures a seamless monitoring and verification of the whole process.



MAXMAILER



LCD CONTROL PANEL

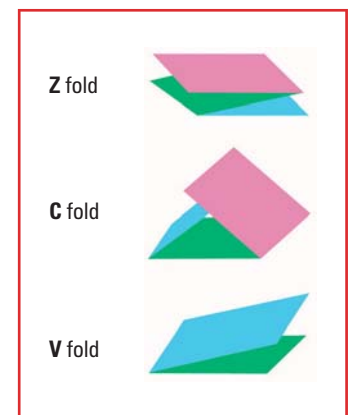

CARRIER FOLDING





TECHNICAL FEATURES

PERFORMANCE "up to 1400 CPH depending on system and format; 1000 CPH with magnetic stripe or barcode reading"

AFFIXING - CARD HANDLING

card dimensions	CR80 - ISO standard
card thickness	0.76 ÷ 0.8 mm / 29,92 ÷ 31,5 mil
input hopper	200 cards, can be reloaded without interrupting card production
pre-embossed cards	Yes
cards per carrier	up to 8 (4 if folded)
card positioning	defined by software

FOLDING & INSERTING - CARRIER, INSERT & ENVELOPE

carrier dimensions	standard A4, letter size or legal size
carrier weight	80-100 gsm
carrier feed	single one; multiple sheet
carrier printing	Optional: Kyocera FS3800 series - Kyocera FS9100/9500 series - HP 4200/4300/4015 series
carrier folding	Maximailer Plus: Z, C, V folds
envelope types	Maximailer Plus: C5, C6

READING OPTIONS & DATA MATCHING

magnetic stripe reader	standard reading system: 3 ISO 7811 tracks, LoCo, HiCo, JIS
OCR reader	optional: OCR KIT - NEW camera system provided with LED lighting to match card text with database
barcode reader	optional: NEW card barcode reader front/rear
smartcard unit	optional: contact and contactless
barcode carrier verification	Yes - front / rear - for card/carrier matching

COMMUNICATION INTERFACE & SOFTWARE

communication interface	RS232 serial port
operating system	Multicard 2006 compatible with Windows 2000/XP/Vista/Seven. Error management, job report, DB source ODBC/OLEDB. Expert Field Engine.
application program	User interface monitoring, card production control, pre-encoded card reading with complete "processing operation, system status and help messages displayed on personal computer. Rejected card alarm notification. Label presence sensor"
connection	Smart Database, Multicard, DB Matching with Mag Tape (ISO, Jis), Microchip, Barcode. Microsoft Office integration, Barcode control. Several types of Database tables can be connected. Access, SQL Server, Oracle, and through ODBC Text, Excel.
protocol	Chip 10
software application (optional)	PowerCard Integration: The PowerCard Integration software is capable of managing the whole production process, from data import to card mailing, supervising multiple production lines simultaneously and ensuring complete integrity of the production area in real time. PowerCard Integration is the perfect application for production environments where a high throughput and a wide range of jobs are the norm.

HARDWARE

power supply	100 - 117 - 220 - 230 or 240 Volts - 50 or 60 Hz
power consumption	Insertor + Maximailer Plus: 1100 W max
operating temperature	5° ÷ 35°C / 41° ÷ 95 °F
relative humidity	30% - 90% without condensation
dimensions (WxDxH)	1070 x 570 x 1220 mm / 42.12" x 22.44" x 48" in
weight	120 Kg (Insertor) / 265 lbs

PRO SERIES MULTI MODULAR SYSTEM - The Pro Series units can operate in a stand alone or in in-line configuration with 2 up to 4 modules. The INSERTER 3000 can be connected to: MULTIFEEDER 6000, THERMAL 1000/2000, EMBOSSER 1000/2000. The modular concept of the hardware with the easy-to-use MultiCard 2006 software makes the PRO SERIES a unique scalable system for complete card personalization.



MF Group SpA - CIM

HEADQUARTERS/OFFICES: Loc. Braine, 54/A - 40036 Rioveggio (BO) - Italy - Tel. +39 051 6776 611 - Fax +39 051 6776 612

FACTORY: Via O. Serra, 2 - 40012 Calderara di Reno (BO) - Italy - Tel +39 051 6465 011 - Fax +39 051 6465 012

www.cimitaly.it - info@cimitaly.it